SINGLE-SEAL EXPANSION JOINT

Wall to Wall

100 - 150 mm (4 - 6") Expansion Gaps

Maxatec 160 : A07

Features

Surface

Ribbed surface for greater movement

Movement

High movement capacity

Seismic movement capacity

ASTM E-1399	Class I:	Thermal
	Class II:	Wind
	Class III:	Seismic

Traffic Frequency per day

-	-	-	-	-

System Options

Gap width(s)	100, 125, 150 mm
Height(s)	90 mm
Metal type(s)	6063 T5 & T6 Aluminium
Seal colour(s)	Black (RAL 7021) Grey (RAL 7038) Beige (RAL 1015)
Fire barrier	120-240 minutes
Waterproofing	Moisture barrier
Pre-assembly in factory	Contact Vexcolt

APPLICATIONS

Airport Terminals | Educational | Exhibition Centres
Department Stores | Distribution & Retail Warehouses
Factories | Hospitals | Museums | Offices & Hotels
Parking | Places of Worship | Residential Buildings
Rail, Metros & Elevated Rail Stations | Roads & Bridges
Shopping Centres | Sports Stadiums | Supermarkets

www.vexcoltindia.com

VEXCOLT

| United Kingdom | T : +44 (0) 3707 876 543 | E : info@vexcolt.com | W : www.vexcolt.com
| India | T : +91 9599 291 000 | E : info@vexcoltindia.com | W : www.vexcoltindia.com

SINGLE-SEAL EXPANSION JOINT

Wall to Wall

100 - 150 mm (4 - 6”) Expansion Gaps

Maxatec 160 : A07

Expansion Joint Selection Criteria **Load Rating** **Product Details**
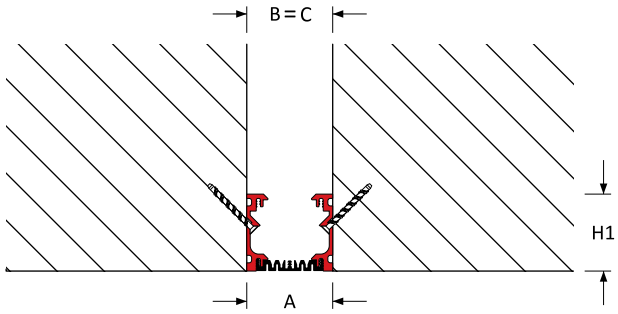
Joint Location	Gap Width B (mm)	Movement Capacity (mm) ±	Movement Capacity (mm) [Total]	Eurocode Rating				Product Dimensions Height H1 (mm)	Product Dimensions Height H2 (mm)	Product Dimensions Sightline A (mm)	Product Dimensions Blockout C (mm)	Product Number
Wall - Wall	100	± 50	[100]	-	-	-	-	90	-	100	100	160-A07-100
	125	± 60	[120]							125	125	160-A07-125
	150	± 75	[150]							150	150	160-A07-150